



CELLULAR



DESIGNER:

WOVEN IMAGE

CATEGORY:

WALLCOVERING

ECHOPANEL 12MM

ACOUSTIC SOLUTIONS

BOX OF:

SOLD INDIVIDUALLY

COMPOSITION:

100% PET (60% RECYCLED)

WEIGHT:

2400G/M2

DIMENSIONS:

1158 X 2380MM

THICKNESS:

12MM

SOUND ABSORPTION:

AS ISO 354 - 2006

NRC VALUE: 0.35 (NO AIR GAP)

NRC VALUE: 0.55 (20MM AIR GAP)

NRC VALUE: 0.75 (50MM AIR GAP)

LIGHTFASTNESS:

ISO 105-B02 - 1994 RATING: 6-7

AS 2001.4.21-1970 RATING: 6-7

FIRE TEST:

AS 1530.3

ISO 9705: GROUP 1

GB 8624B1

BS EN 13501.1: CLASSIFICATION B-S1, D0

SUSTAINABILITY:

GREENTAG CERTIFIED


LCA RATE: GOLD STREAMLINED

GREEN RATE: LEVEL A





DIRECTION

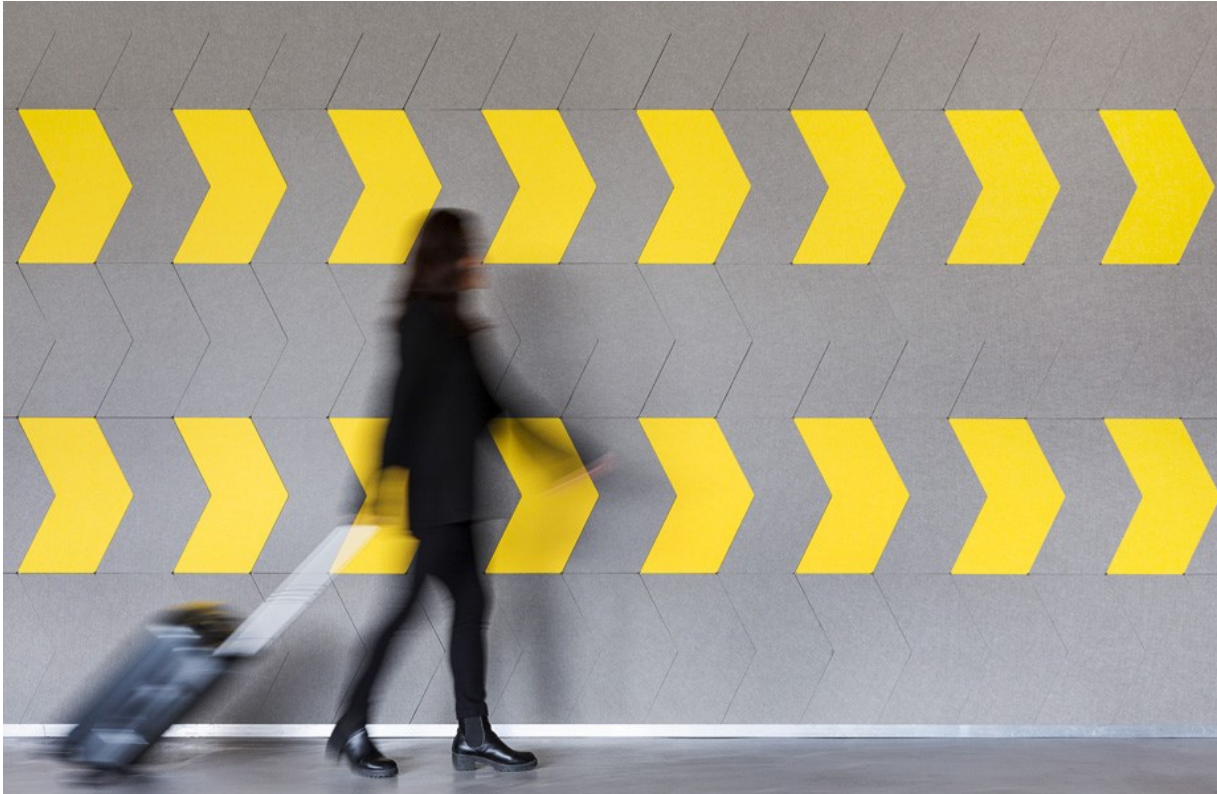

DESIGNER:

WOVEN IMAGE

CATEGORY:

TILES

ACOUSTIC SOLUTIONS

ECHOPANEL 12MM

BOX OF:

10

COMPOSITION:

100% PET (60% RECYCLED) WITH ADHESIVE BACKING

WEIGHT:

2.99KG PER BOX

DIMENSIONS:

500 X 370MM (+/-2MM)

THICKNESS:

12MM (+/-7%)

SOUND ABSORPTION:

AS ISO 354 - 2006

NRC VALUE: 0.35 (NO AIR GAP)

LIGHTFASTNESS:

ISO 105-B02 - 1994 RATING: 6-7

FIRE TEST:

ISO 9705: GROUP 1

AS 1530.3

GB 8624B1

BS EN 13501.1: CLASSIFICATION B-S1, D0

SUSTAINABILITY:

GREENTAG CERTIFIED


LCA RATE: GOLD STREAMLINED

GREEN RATE: LEVEL A





Groove 45

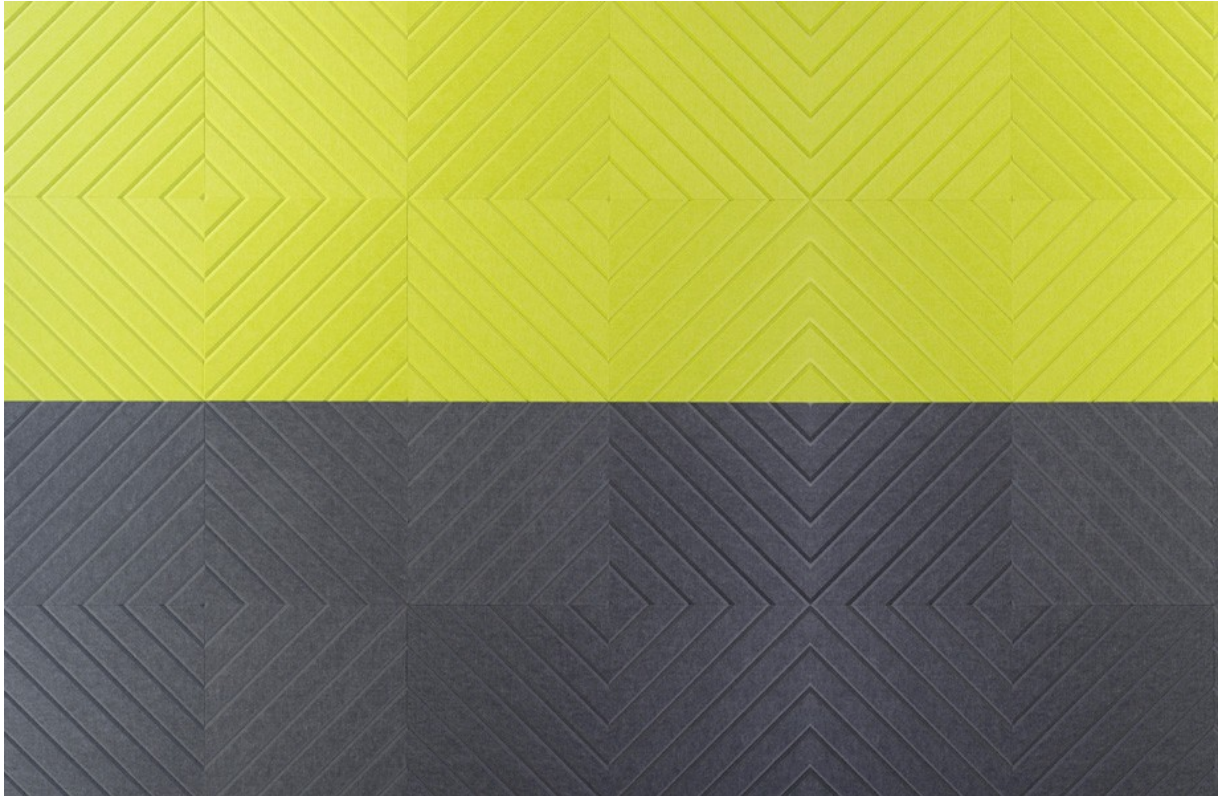

DESIGNER:

WOVEN IMAGE

CATEGORY:

TILES

ACOUSTIC SOLUTIONS

ECHOPANEL 12MM

BOX OF:

10

COMPOSITION:

100% PET (60% RECYCLED) WITH ADHESIVE BACKING

WEIGHT:

6.63KG PER BOX

DIMENSIONS:

500 X 500MM (+/-2MM)

THICKNESS:

12MM (+/-7%)

SOUND ABSORPTION:

AS ISO 354 -2006

NRC VALUE: 0.35 (NO AIR GAP)

LIGHTFASTNESS:

ISO 105-B02 - 1994 RATING: 6-7

CATEGORY:

ENVIRONMENTAL INFORMATION REFER TO PRODUCT SPECIFICATION

FIRE TEST:

ISO 9705: GROUP 1

AS 1530.3

GB 8624 B1

BS EN 13501.1: CLASSIFICATION B-S1, D0

SUSTAINABILITY:

GREENTAG CERTIFIED


LCA RATE: GOLD STREAMLINED

GREEN RATE: LEVEL A





Groove 90

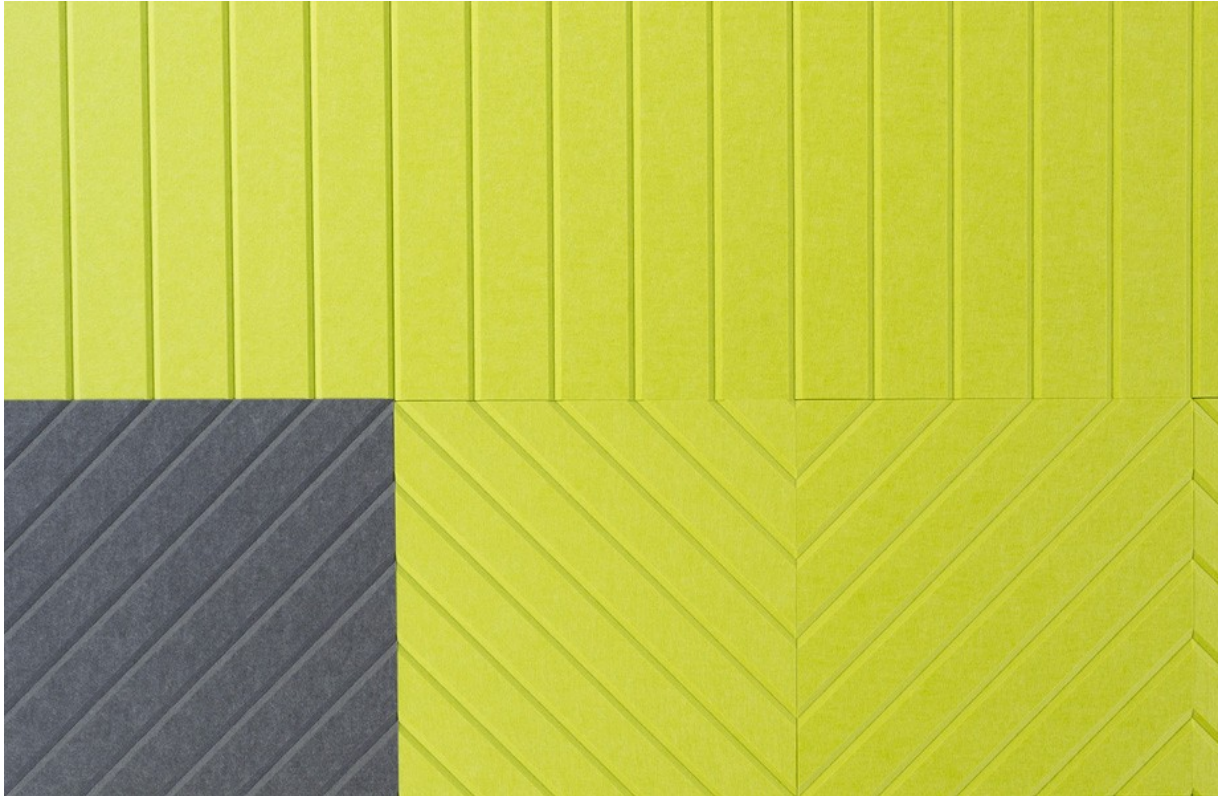**DESIGNER:**

WOVEN IMAGE

CATEGORY:

TILES

ACOUSTIC SOLUTIONS

ECHOPANEL 12MM

BOX OF:

10

COMPOSITION:

100% PET (60% RECYCLED) WITH ADHESIVE BACKING

WEIGHT:

6.63KG PER BOX

DIMENSIONS:

500 X 500MM (+/-2MM)

THICKNESS:

12MM (+/-7%)

SOUND ABSORPTION:

AS ISO 354 -2006

NRC VALUE: 0.35 (NO AIR GAP)

LIGHTFASTNESS:

ISO 105-B02 -1994 RATING: 6-7

FIRE TEST:

ISO 9705: GROUP 1

AS 1530.3

GB 8624 B1

BS EN 13501.1: CLASSIFICATION B-S1, D0

SUSTAINABILITY:

GREENTAG CERTIFIED


LCA RATE: GOLD STREAMLINED

GREEN RATE: LEVEL A





HEX TILE

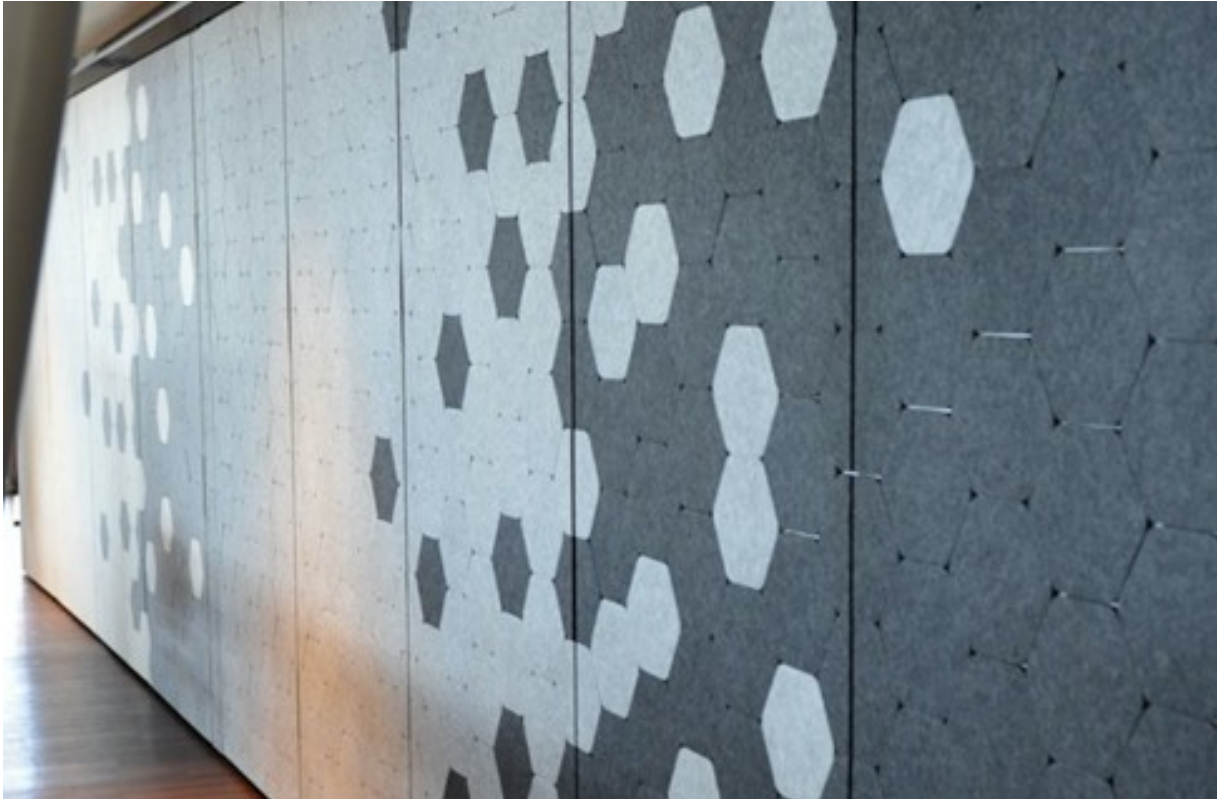

DESIGNER:

WOVEN IMAGE

CATEGORY:

TILES

ECHOPANEL 12MM

ACOUSTIC SOLUTIONS

BOX OF:

10

COMPOSITION:

100% PET (60% RECYCLED)

WEIGHT:

2400G/M2

DIMENSIONS:

200 X 200MM

THICKNESS:

12MM

SOUND ABSORPTION:

AS ISO 354 - 2006

NRC VALUE: 0.35 (NO AIR GAP)

NRC VALUE: 0.55 (20MM AIR GAP)

NRC VALUE: 0.75 (50MM AIR GAP)

LIGHTFASTNESS:

ISO 105-B02 - 1994 RATING: 6-7

AS 2001.4.21-1970 RATING: 6-7

FIRE TEST:

AS 1530.3

ISO 9705: GROUP 1

GB 8624B1

BS EN 13501.1: CLASSIFICATION B-S1, D0

SUSTAINABILITY:

GREENTAG CERTIFIED

LCA RATE: GOLD STREAMLINED

GREEN RATE: LEVEL A





OBLONG TILE



DESIGNER:

WOVEN IMAGE

CATEGORY:

TILES

ECHOPANEL 12MM

ACOUSTIC SOLUTIONS

COMPOSITION:

100% PET (60% RECYCLED)

WEIGHT:

2400G/M²

DIMENSIONS:

100 X 200MM

THICKNESS:

12MM

SOUND ABSORPTION:

AS ISO 354 - 2006

NRC VALUE: 0.35 (NO AIR GAP)

NRC VALUE: 0.55 (20MM AIR GAP)

NRC VALUE: 0.75 (50MM AIR GAP)

LIGHTFASTNESS:

ISO 105-B02 - 1994 RATING: 6-7

AS 2001.4.21-1970 RATING: 6-7

FIRE TEST:

AS 1530.3

ISO 9705: GROUP 1

GB 8624B1

BS EN 13501.1: CLASSIFICATION B-S1, D0

SUSTAINABILITY:

GREENTAG CERTIFIED

LCA RATE: GOLD STREAMLINED

GREEN RATE: LEVEL A





SQUARE TILE



DESIGNER:

WOVEN IMAGE

CATEGORY:

TILES

ECHOPANEL 12MM

COMPOSITION:

100% PET (60% RECYCLED)

WEIGHT:

2400G/M²

DIMENSIONS:

200 X 200MM

THICKNESS:

12MM

SOUND ABSORPTION:

AS ISO 354 - 2006

NRC VALUE: 0.35 (NO AIR GAP)

NRC VALUE: 0.55 (20MM AIR GAP)

NRC VALUE: 0.75 (50MM AIR GAP)

LIGHTFASTNESS:

ISO 105-B02 - 1994 RATING: 6-7

AS 2001.4.21-1970 RATING: 6-7

FIRE TEST:

AS 1530.3

ISO 9705: GROUP 1

GB 8624B1

BS EN 13501.1: CLASSIFICATION B-S1, D0

SUSTAINABILITY:

GREENTAG CERTIFIED

LCA RATE: GOLD STREAMLINED

GREEN RATE: LEVEL A





PENTA TILE



DESIGNER:

WOVEN IMAGE

CATEGORY:

TILES

ECHOPANEL 12MM

ACOUSTIC SOLUTIONS

COMPOSITION:

100% PET (60% RECYCLED)

WEIGHT:

2400G/M²

DIMENSIONS:

245 X 185MM

THICKNESS:

12MM

SOUND ABSORPTION:

AS ISO 354 - 2006

NRC VALUE: 0.35 (NO AIR GAP)

NRC VALUE: 0.55 (20MM AIR GAP)

NRC VALUE: 0.75 (50MM AIR GAP)

LIGHTFASTNESS:

ISO 105-B02 - 1994 RATING: 6-7

AS 2001.4.21-1970 RATING: 6-7

FIRE TEST:

AS 1530.3

ISO 9705: GROUP 1

GB 8624B1

BS EN 13501.1: CLASSIFICATION B-S1, D0

SUSTAINABILITY:

GREENTAG CERTIFIED


LCA RATE: GOLD STREAMLINED

GREEN RATE: LEVEL A





Plus

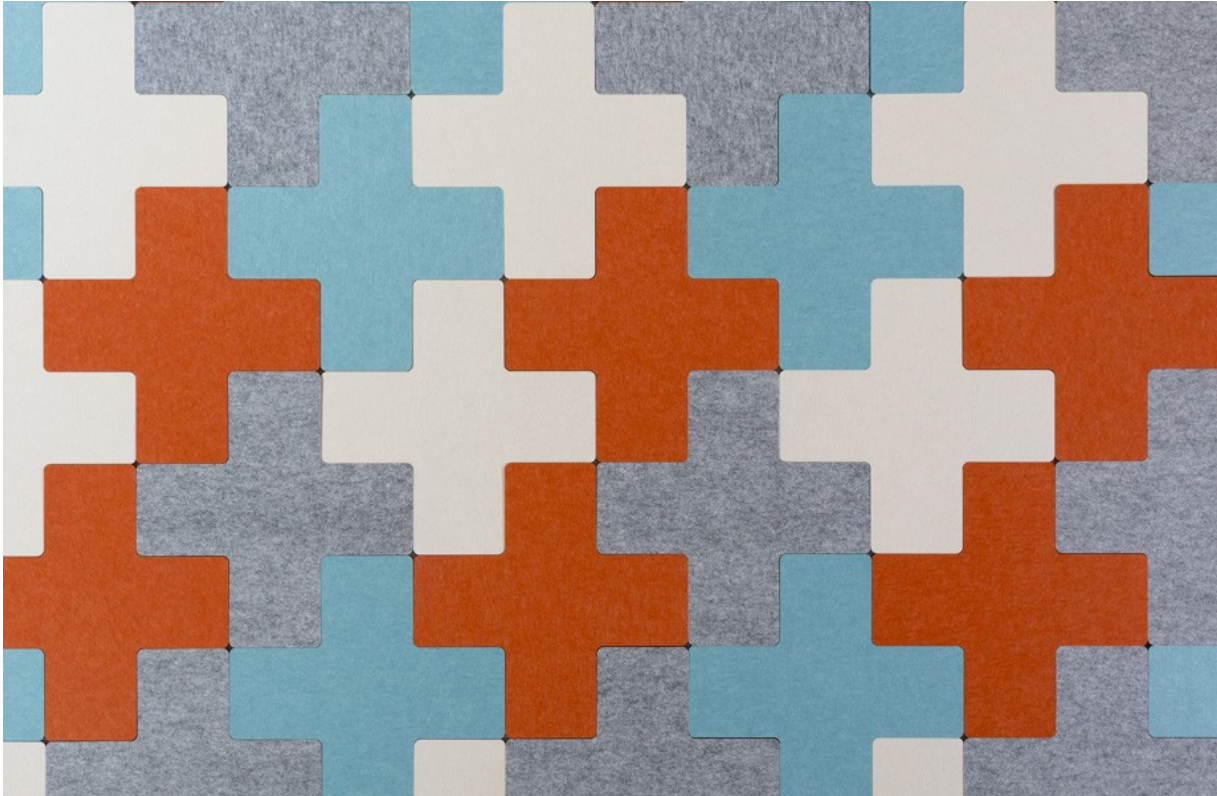

DESIGNER:

WOVEN IMAGE

CATEGORY:

TILES

ECHOPANEL 12MM

ACOUSTIC SOLUTIONS

BOX OF:

10

COMPOSITION:

100% PET (60% RECYCLED) WITH ADHESIVE BACKING

WEIGHT:

3.33KG PER BOX

DIMENSIONS:

500 X 500MM (+/-2MM)

THICKNESS:

12MM (+/-7%)

SOUND ABSORPTION:

AS ISO 354 -2006

NRC VALUE: 0.35 (WITH NO GAPS)

LIGHTFASTNESS:

ISO 105-B02 - 1994 RATING: 6-7

FIRE TEST:

ISO 9705: GROUP 1

AS 1530.3

GB 8624B1

BS EN 13501.1: CLASSIFICATION B-S1, D0

SUSTAINABILITY:

GREENTAG CERTIFIED

LCA RATE: GOLD STREAMLINED

GREEN RATE: LEVEL A





VEE TILE



DESIGNER:

WOVEN IMAGE

CATEGORY:

TILES

ACOUSTIC SOLUTIONS

ECHOPANEL 12MM

BOX OF:

10

COMPOSITION:

100% PET (60% RECYCLED)

DIMENSIONS:

500 X 500MM

THICKNESS:

13MM

SOUND ABSORPTION:

AS ISO 354 - 2006

NRC VALUE: 0.35 (NO AIR GAP)

NRC VALUE: 0.55 (20MM AIR GAP)

NRC VALUE: 0.75 (50MM AIR GAP)

LIGHTFASTNESS:

ISO 105-B02 - 1994 RATING: 6-7

AS 2001.4.21-1970 RATING: 6-7

FIRE TEST:

AS 1530.3

ISO 9705: GROUP 1

GB 8624B1

SUSTAINABILITY:

GREENTAG CERTIFIED

LCA RATE: GOLD PLUS

GREEN RATE: LEVEL A

